


Front belt system Modular. Flexible. Fast.

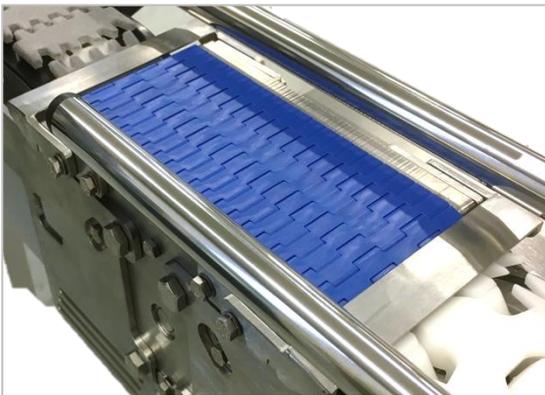

Properties

- Safe and gentle product transport via the interfaces of drive and deflection units
- Can be used in the standard system as well as the spiral conveyor from Carryline
- Available in aluminum and stainless steel

Front belt system

Modular. Flexible. Fast.

Execution

Available in	Aluminium	Stainless steel
System-/chain width (mm)	62, 83, 140, 220	62, 83, 140, 220
Max. recommended transport weight (kg)	System 62 und 83: 10 kg System 140 und 220: 12 kg	System 62 und 83: 10 kg System 140 und 220: 12 kg
Max. recommended speed	Ca. 50m/Min.	Ca. 50m/Min.
Working temperature	-20°C – +60°C	-20°C – +60°C
Noise level	<55 dB (A) at 20m/min	<55 dB (A) at 20m/min